


PLB60A-Series


HIGH PERFORMANCE FAN



AIR PERFORMANCE

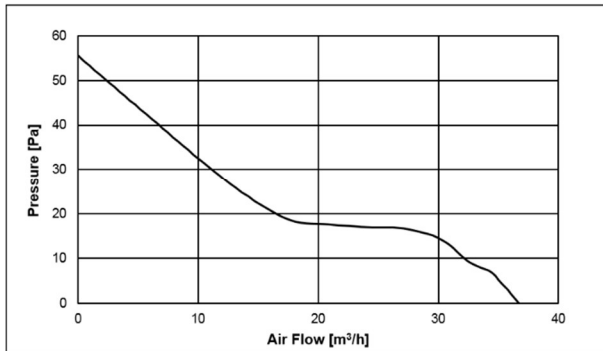

SHAPE AND DIMENSION

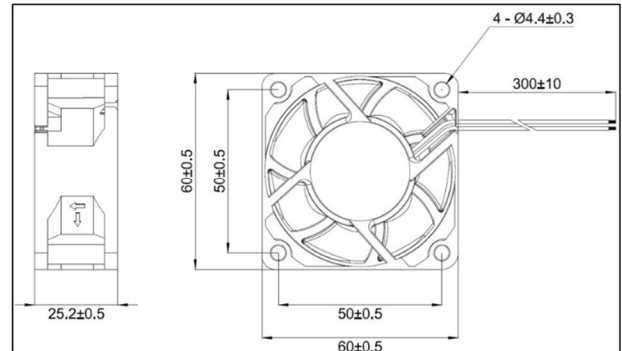

Lead Wire: AWG24
blk=GND, red=Vcc

PERFORMANCE

CE			PLB60A24SE16A
Operating voltage	[VDC]		12 ... 24 ... 26.4
Typ. operating current	[mA]		60
Max. start current	[mA]		350
Max. air flow	[l/min-m³/h]		611 – 36.7
Max. air pressure	[Pa-mmH²O]		55.6 – 5.67
Typ. noise (1m dist. from air intake side)	[dB(A)]		36
Typ. rotor speed	[RPM]		4500
Operating temperature	[°C]		-10 ... +70
Life expectancy L10/MTBF@ 40°C	[h]		70000/550000
Bearing system			ball bearings
Weight	[g]		62.5

This **SEPA**® DC-fan is suitable for industrial or automotive use and has a remarkable air flow performance. It is permanently protected electrically against reverse polarity, blocking and thermal overloading. Due to the low rotor weight and precision balancing, it is virtually vibration-free. It is also insensitive to shock.

Further features of this fan are its extremely robust and torsionally stiff plastic housing of PBT and the ball bearings with narrow tolerances of special steel.

PLB60A-Series

HIGH PERFORMANCE FAN



- **ACCESSORIES:**

Connector: on request

- **ORDER INFORMATION (Delivery time on request)**

PLB60A24SE16A **SEPA**® DC-fan, 60x60x25mm, 24VDC, Ball Bearing, **CE**

776032103

SEPA® is the brand name for fans and CPU-cooler, made by POWER LOGIC TECH. Inc., Taipei