




AD06024EB257101(00PH5)

Luftleistung

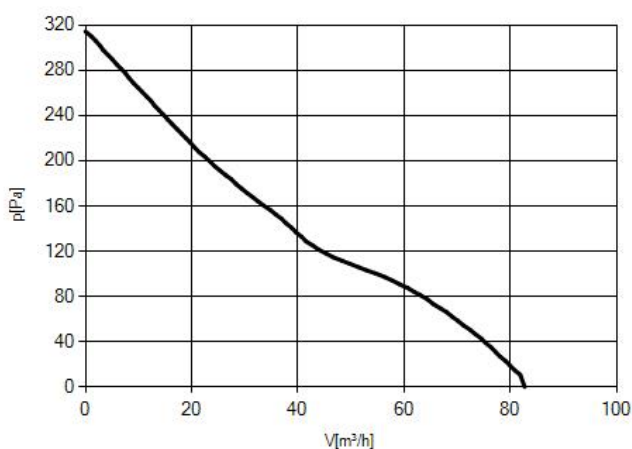

Einzellitzen AWG24, verzinkt
VCC = rot GND = schwarz FG =
Kein Hindernis im Abstand von 1mm von der Lufteintrittseite

Zertifizierungen	CE / UL
U [V DC]	24 [V]
I _{typ} [mA]	47 [mA]
I _{max} [mA]	[mA]
V _{max} [m³/h]	85 [m³/h]
P _{max} [Pa]	310 [Pa]
Geräusch [dB(A)]	58,6 [dB(A)]
Drehzahl [min ⁻¹]	10500 [min ⁻¹]
Signal / FG [Imp/U]	[Imp/U]
PWM	nein
Temp. [°C]	-10 [°C] - 70 [°C]
L10/MTTF @ 40°C [h]	70000 [h] - 280000 [h]
Lagersystem	Kugellager
Gewicht [kg]	0,067


* Geräusch und Drehzahl unterliegen toleranzbedingten Abweichungen.

BESTELLDATEN

AD06024EB257101(00PH5) Art.Nr.: 111112058

Technische Änderungen vorbehalten
26.11.2025

SEPA EUROPE GmbH DE-79427 Eschbach Tel.: +49 7634/59459-0 info@sepa-europe.com



AD06024EB257101(00PH5)
