




HXB25B12-003

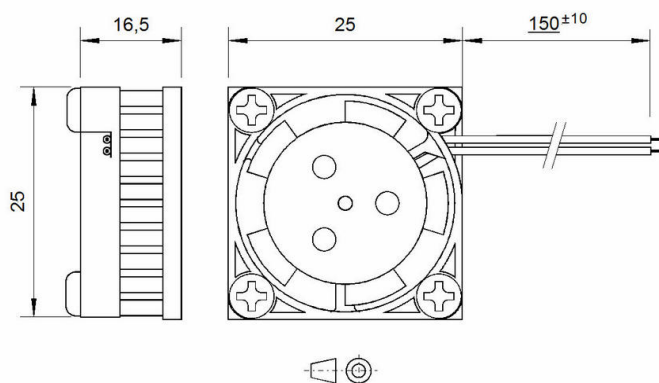

Einzellitzen AWG28, verzinkt
VCC = rot GND = schwarz FG =

Zertifizierungen	CE / WEEE
U [V DC]	12 [V]
Rth [K/W]	3,8
I _{typ} [mA]	30 [mA]
I _{max} [mA]	80 [mA]
Geräusch [dB(A)]	19 [dB(A)]
Drehzahl [min ⁻¹]	11000 [min ⁻¹]
Signal / FG [Imp/U]	[Imp/U]
PWM	nein
Temp. [°C]	-40 [°C] - 80 [°C]
L10/MTTF @ 40°C [h]	70000 [h] - 350000 [h]
Lagersystem	Kugellager
Gewicht [kg]	0,011

BESTELLDATEN

HXB25B12-003 Art.Nr.: 112522000

Technische Änderungen vorbehalten
26.11.2025

SEPA EUROPE GmbH DE-79427 Eschbach Tel.: +49 7634/59459-0 info@sepa-europe.com